

ON-OFF Delay Timer

ATA -ON/OFF




Features

- Microcontroller based
- ON-delay/OFF-delay
- Time range: 0.1s-1s, 1s-10s, 0.3-30s, 0.6-60s
0.1min-1min, 1min-10min
- Repetition accuracy < 0.2%
- LED indication for power supply and relay status
- 1 Module Din-rail mounting

Technical data

Models	ATA-ON	ATA-OFF
Supply terminals	A1, A2, A3	
Supply voltage	A1-A2: AC 220V; A3-A2: AC/DC 24V	
Rated frequency	50/60Hz	
Time range	0.1-1s, 1-10s, 0.1m-1m, 1-10m, 0.3-30s, 0.6-60s	
Setting accuracy	< 5%	
Repetition accuracy	< 0.2%	
Output contacts	1 C/O	
Current rating	8A /AC1	
Contacts capacity	AC-15: 2A	
Insulation voltage	250V	
Protection degree	IP20	
Pollution degree	3	
Electrical life	10 ⁵	
Mechanical life	10 ⁶	
Altitude	≤2000m	
Ambient temperature	-5°C~+40°C	
Storage temperature	-10°C~+50°C	
Wire size	0.5mm ² ~1mm ²	
Torque	0.5Nm	
Mounting	TH-35 DIN-Rail	


Time range

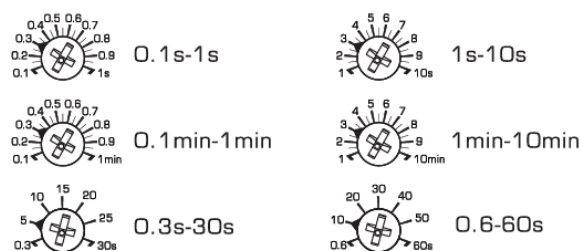

Function diagrams



Wiring diagrams

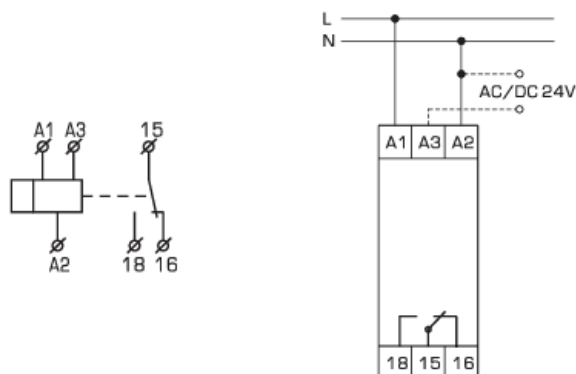

Front-face panel

